


## 9-30 CURB AND GUTTER

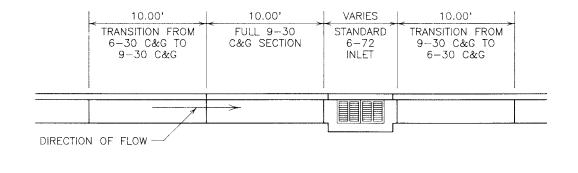

REVISIONS			
NO.	DATE	BY	REMARKS
		ļ	
-+		<del> </del>	
		1	
-			

## NOTES:

- 1. Pre—cut exp. joint material shall be used in all exp. joints.
- 2. Exp. joint material shall be installed at ends of transition sections.
- 3. Exp. joint material shall be installed at a minimum of 5 ft. from inlet structures.
- 4. Conc. to be Class 'A' (6 bag min).

CITY OF MEMPHIS DIVISION OF ENGINEERING

DESIGN STANDARD FOR

9-30 CURB AND TRANSITION

Punfleller, P.E. 7.30-90
DEPUTY CITY ENGINEER DATE

Sugant Sondward P.E. 7-3/-10
CITY ENGINEER DATE